




ART4

4 CHANNEL AMPLIFIER REMOTE TRIGGER
ADJUSTABLE ON/OFF TIMER

User Manual

ADJUSTABLE AMPLIFIER TRIGGER TIMER

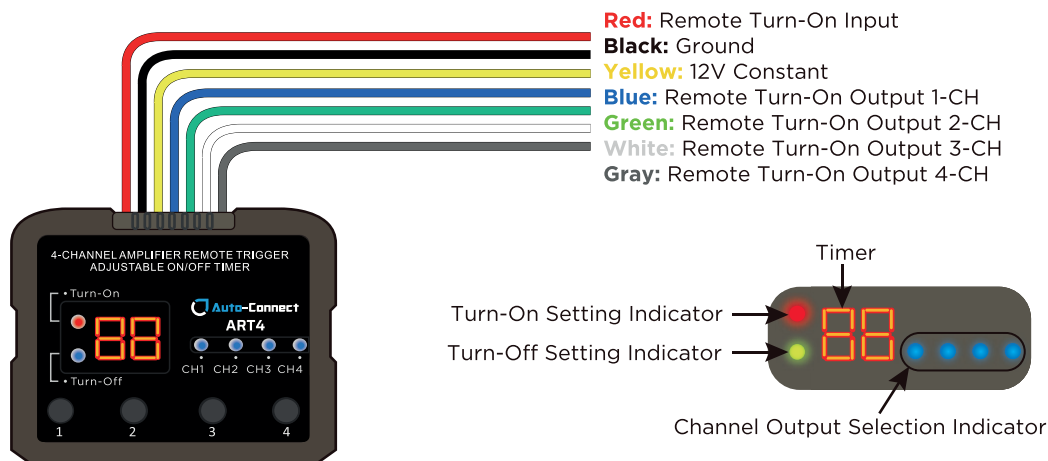

- ❶ Channel Output Selector
- ❷ Turn-On/Off Selector
- ❸ Timer Up
- ❹ Timer Down

SPECIFICATIONS

Working Voltage: 10v-16v
 Trigger output current: 500mA
 Trigger input Current: 1mA
 ON/OFF timer adjustable up to 30 sec

RECOMMENDED

- Crimping tool and connectors, or solder gun, solder, and heat shrink
- Tape
- Wire cutter
- Zip-ties

SETTINGS**(1) Turn-On Delay Setting**

- Press the ❶ button to select remote output channels (1CH to 4CH with blue LED indicators)
- Press the ❷ button to select Turn-On delay setting, the Red LED flashes.
- Press the ❸ and ❹ button to set up the delay, up to 30 seconds. If there is no action for 3 seconds, it will return to display mode.

(2) Turn-Off Delay Setting

- Press the ❶ button to select remote output channels (1CH to 4CH with blue LED indicators)
- Press the ❷ button to select Turn-Off delay setting, the Green LED flashes.
- Press the ❸ and ❹ button to set up the delay, up to 30 seconds. If there is no action for 3 seconds, it will return to display mode.

Note: To turn on the display press any button.

For further technical support and additional help please contact the dealer/distribution agent for your country.

Winn Scandinavia reserves for possible typos, factual or numeric errors that may have been printed on any products, package designs, user manuals and/or other included accessories.